


iLOVEUV

iLOVEUV

**UV DTF PRINTER /UV FLATBED PRINTER
UV ROLL TO ROLL /HYBRID UV PRINTER**

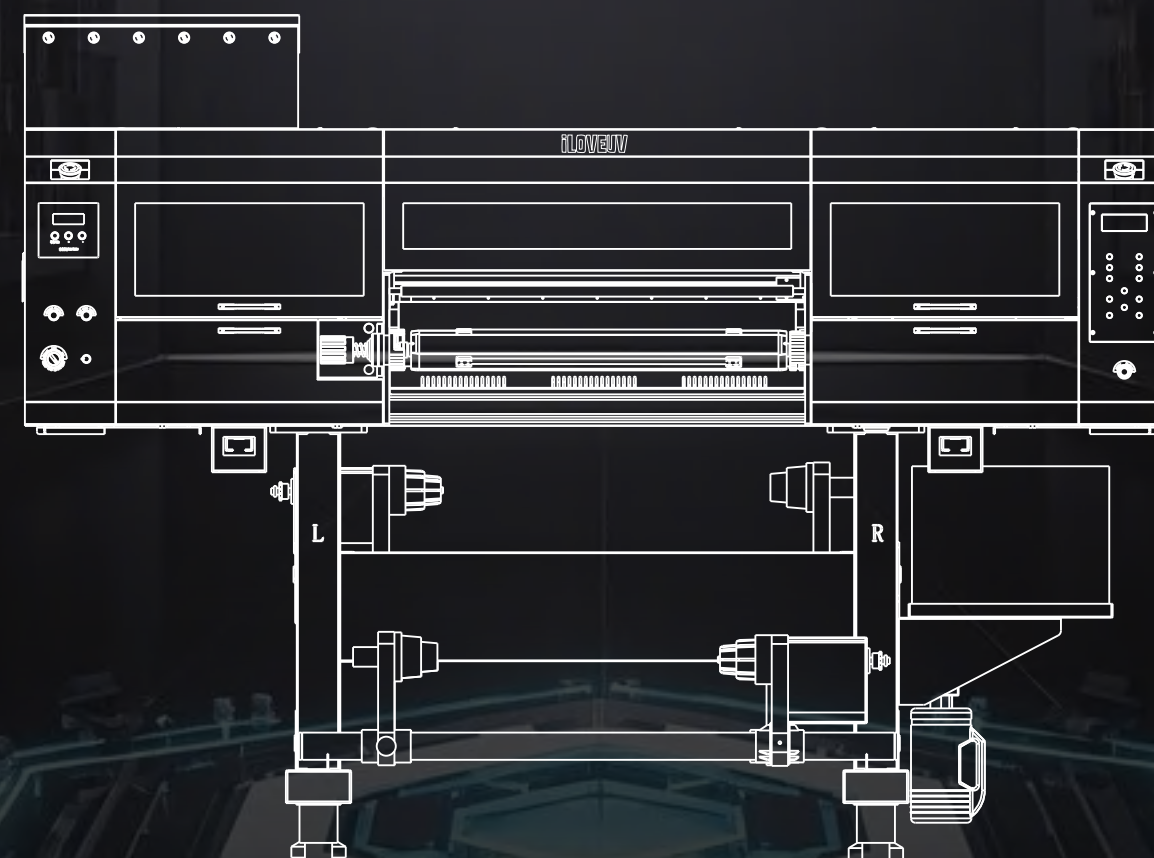

HENAN UNITED COLOR CO., LTD.

Add : A-010 Zhong yuan Guo chuang Industrial Park,Xinxiang City, Henan China
Tel:+86 15903862712 Web:iloveuv.en.alibaba.com Email:admin@iloveuv.com

HENAN UNITED COLOR CO., LTD.

ABOUT US



“iLOVEUV” is the professional team specialized in UV printers from Henan United Color Co.,Ltd., which short as “iUV” brand series. Factory located at Zhongyuan Guochuang Industrial Park, Xinxiang City, Henan Province China. covers an area of 12000 square meters, 12 different modernized workshop, As an industry and trade integration enterprise with independent R&D team, and over 20 years experience in the inkjet printer industry, our main and strongest printers are: UV DTF Printer, UV flatbed Printer in 9060/1313/2513, UV roll to roll Printer and Hybrid UV Printers etc.,we adhere to ensure our printers of the best outstanding performance, excellent printing effect and the great helpful tech-support service to all clients, provide the stable quality at most competitive factory prices, which helps our UV printers been send to more than 50 countries and nations, established the long-term win-win relationship with thousands of customers.The Global distributing agent welcomed sincerely! our advantage of original manufacturer factory enable us the abilities to supply OEM/ODM production! Strict quality control, stable delivery and profitable agent agreement to help your business expand and win the market.Excited to kick off this fantastic business journey with you! For questions if any, kindly write us without hesitation and much glad to help!



CORPORATE CULTURE

CORPORATE VISION

Lead Chinese Advertising Equipment industry, create the most valuable listed company, Provide global customers with more cost-effective "China Intelligent Manufacturing"

CORPORATE MISSION

Create value for customers, make employees be partners, realize the freedom of wealth, then contribute to society

CORPORATE VALUES

Happiness, Unity , Diligence and Innovation

MANAGEMENT IDEAS

Adhere to the spirit of craftsmanship, operate with integrity, focus on customers and serve customers wholeheartedly.

ENTERPRISE QUALIFICATION





60CM UV DTF PRINTER

EPSON I3200-U1

Four-Head Configuration

COLOR WHITE COLOR VARNISH
DOUBLE-SIDED PRINTING

6m²/h

6PASS

4.5m²/h

8PASS

GLUE WHITE COLOR+VARNISH+VARNISH
GOLD- FOIL LAMINATING
PRINT SPEED

6m²/h

6PASS

TECHNICAL PARAMETERS

PRINTER MODEL	IUV6004	DATA TRANSMISSION	High-speed Gigabit network cable transmission
PRINT WIDTH	600mm	SUPPLY VOLTAGE	AC220V/110V
PRINT HEAD	Epson i3200-U1 4 head	POWER	3.3KW
WORKING ENVIRONMENT	Temperature:18-30℃ Humidity: 40-60%	EQUIPMENT SIZE	2183X822X1565mm
PACKAGING WEIGHT	Printing equipment 370Kg laminating 57Kg	PACKING SIZE	2284X1120X800mm

PRODUCT FEATURES



- White ink circulation system
- Ink and paper shortage alarm
- Silent guide rail
- laminator/Hot foil stamping Retraction system

APPLICATION



iLOVEUV



30CM UV DTF PRINTER

EPSON F1080X3PCS

Three-Head Configuration

WHITE COLOR VARNISH
PRINT SPEED

4m²/h

6PASS

3m²/h

8PASS

TECHNICAL PARAMETERS

PRINTER MODEL	IUV3003-(1600)	RIP SOFTWARE	Photoprint
PRINT WIDTH	300mm	SUPPLY VOLTAGE	AC110-220V
PRINT HEAD	Epson i1600-U1X2pcs	POWER	1.5KW
WORKING ENVIRONMENT	Temperature:18-30℃ Humidity: 40-60%	EQUIPMENT SIZE	1300X825X1260mm
PACKAGING WEIGHT	208kg	PACKING SIZE	1830X759X727mm

PRODUCT FEATURES



APPLICATION



iLOVEUV



30CM UV DTF PRINTER

EPSON F1080X4PCS

Four-Head Configuration

GLUE/W/CMYK/V1/V2
PRINT SPEED

3.5m ² /h	2.5m ² /h
6PASS	8PASS

UV-DTF PRINTERS

TECHNICAL PARAMETERS

PRINTER MODEL	IUV3004-X5	RIP SOFTWARE	Photoprint
PRINT WIDTH	300mm	SUPPLY VOLTAGE	AC110-220V
PRINT HEAD	Epson F1080X4pcs	POWER	1.6KW
WORKING ENVIRONMENT	Temperature:18-30℃ Humidity: 40-60%	EQUIPMENT SIZE	1300X1050X1265mm
PACKAGING WEIGHT	230kg	PACKING SIZE	1850X1080X740mm

PRODUCT FEATURES

White color varnish ,foil varnish
white ink circulation system
Suction purification device
Rollers rise and fall synchronously

APPLICATION

HOT STAMPING EFFECT

HOT STAMPING EFFECT

HOT STAMPING EFFECT

HOT STAMPING EFFECT

iLOVEUV



IUV3003-X5 UV DTF PRINTER

EPSON F1080

Three-Head Configuration

PRINT SPEED

4m²/h

6PASS


3m²/h

8PASS

TECHNICAL PARAMETERS

PRINTER MODEL	IUV3003-X5	RIP SOFTWARE	Photoprint
PRINT WIDTH	300mm	SUPPLY VOLTAGE	AC220V/110V
PRINT HEAD	Epson F1080-A1X 3 head	POWER	1.5KW
WORKING ENVIRONMENT	Temperature:18-30℃ Humidity: 40-60%	EQUIPMENT SIZE	1200X731X1162mm
PACKAGING WEIGHT	158kg	PACKING SIZE	1584X754X700mm

PRODUCT FEATURES



3 head model white color varnish

High precision printing platform

High quality motor

Double side resistance adjust

APPLICATION

GLASSWARE



METAL PRODUCTS



LEATHER PRODUCTS



WOODWORK



UV-DTF PRINTERS

iLOVEUV



60CM UV DTF PRINTER

EPSON I3200-U1

3-Head Configuration

PRINT SPEED

7 m²/h

6PASS

 $5 \text{ m}^2/\text{h}$

8PASS

UV-DTF PRINTERS


TECHNICAL PARAMETERS

PRINTER MODEL	IUV6003	RIP SOFTWARE	Photoprint
PRINT WIDTH	600mm	SUPPLY VOLTAGE	AC110-220V
PRINT HEAD	Epson i3200-U1X3pcs	POWER	3.1KW
WORKING ENVIRONMENT	Temperature:18-30℃ Humidity: 40-60%	EQUIPMENT SIZE	2102X860X1550mm
PACKAGING WEIGHT	420kg	PACKING SIZE	2224X1120X800mm

PRODUCT FEATURES



APPLICATION

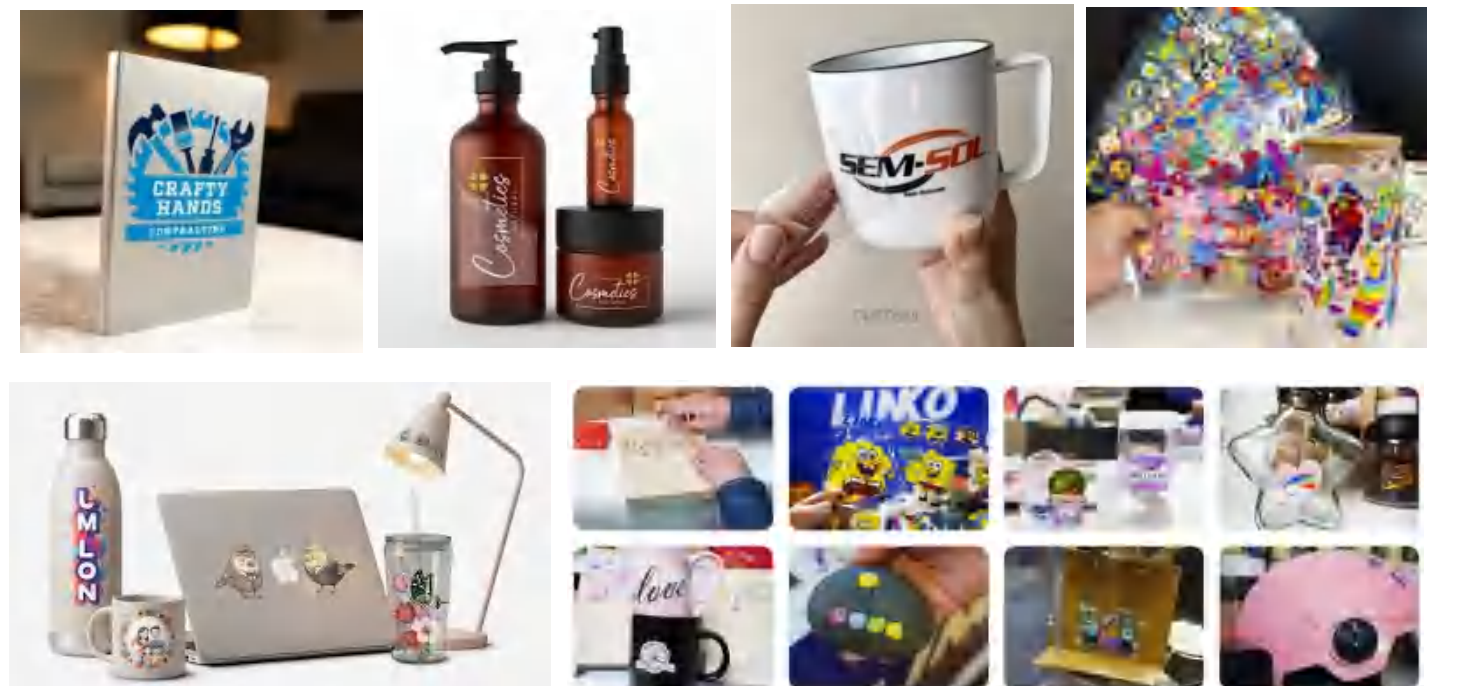



IUV9060 UV FLATBED PRINTER

EPSON I3200-U1 4-Head Configuration

WHITE COLOR+VARNISH+FOIL VARNISH
PRINT SPEED

6.5m ² /h	5m ² /h
6PASS	8PASS

TECHNICAL PARAMETERS

PRINTER MODEL	IUV9060	PRINT THICKNESS	0-300mm
PRINT WIDTH	900X600mm	SUPPLY VOLTAGE	AC220V
PRINTER HEAD	EPSON i3200-U1 4 pcs	POWER	3.6KW
WORKING ENVIRONMENT	Temperature:18-30℃ Humidity: 40-60%	EQUIPMENT SIZE	2156X1395X1446mm
PACKING WEIGHT	500KG	PACKING SIZE	2260X1520X1230mm
15cm 29cm adjustable height for choice			

PRODUCT FEATURES



APPLICATION





IUV9060-3 UV FLATBED PRINTER

EPSON I3200-U1

3pcs

WHITE COLOR VARNISH
PRINT SPEED

6m²/h

6PASS

5m²/h

8PASS

TECHNICAL PARAMETERS

PRINTER MODEL	IUV9060-3	PRINT THICKNESS	0-150mm
PRINT WIDTH	900X600mm	SUPPLY VOLTAGE	AC220V
PRINTER HEAD	EPSON i3200-U1X3pcs	POWER	2.7KW
WORKING ENVIRONMENT	Temperature:18-30℃ Humidity: 40-60%	EQUIPMENT SIZE	2027X1440X1260mm
PACKING WEIGHT	470KG	PACKING SIZE	2200X1530X955mm
2 configuration: AI Camera vision positioning, auto-scan and printing; Regular flatbed UV printing without camera.			

PRODUCT FEATURES



- Ultra HD wide-format scanning camera
- 3 head model White Color Varnish
- 2side 3pcs UV lamp
- Silent guide rail
- High capacity ink tank

APPLICATION





CYLINDER UV PRINTER SINGLE STATION HIGH SPEED

EPSON I1600-U1X2/4PCS

Configuration

PRINTING PRECISION

600*1200dpi

600*1800dpi

TECHNICAL PARAMETERS

MODEL NO	IUVCB-1600	RIP SOFTWARE	ONYX
OVERALL DIMENSION	1500*1000*1380mm	CURING METHOD	LED Curing
PRINTING D & H	D:40*130mm H:260mm	OVERALL WEIGHT(KGS)	400kg
NOZZLE QUANTITY OPTION (PCS)	2-4 pcs (Optional)	AUTOMATIC CLEANING SYSTEM	Press cleaning
INK OPTION	CMYK + W + V	WORK ENVIRONMENT	Operating temperature: 18-30°C Operating humidity: 40%-60%
UV INK CAPACITY	1000ml/bottle	ACCESS PORT	USB3.0

PRODUCT FEATURES



APPLICATION



iLOVEUV



IUV9060-X5 UV FLATBED PRINTER

EPSON F1080-A1 /TX800

Three-Head
Configuration

WHITE COLOR VARNISH
PRINT SPEED

5m²/h

6PASS

3.5m²/h

8PASS

UV-PRINTERS

TECHNICAL PARAMETERS

PRINTER MODEL	IUV9060-X5	PRINT THICKNESS	0-150mm
PRINT WIDTH	900X600mm	SUPPLY VOLTAGE	AC220V/110V±10 50~60HZ
PRINTER HEAD	F1080/TX800	POWER	1.9KW
WORKING ENVIRONMENT	Temperature:18-30℃ Humidity: 40-60%	EQUIPMENT SIZE	1885X1270X1207mm
PACKING WEIGHT	400KG	PACKING SIZE	2040X1380X870mm

PRODUCT FEATURES




2/3 head model White Color Varnish

2side 3pcs UV lamp

Silent guide rail

High capacity ink tank

APPLICATION

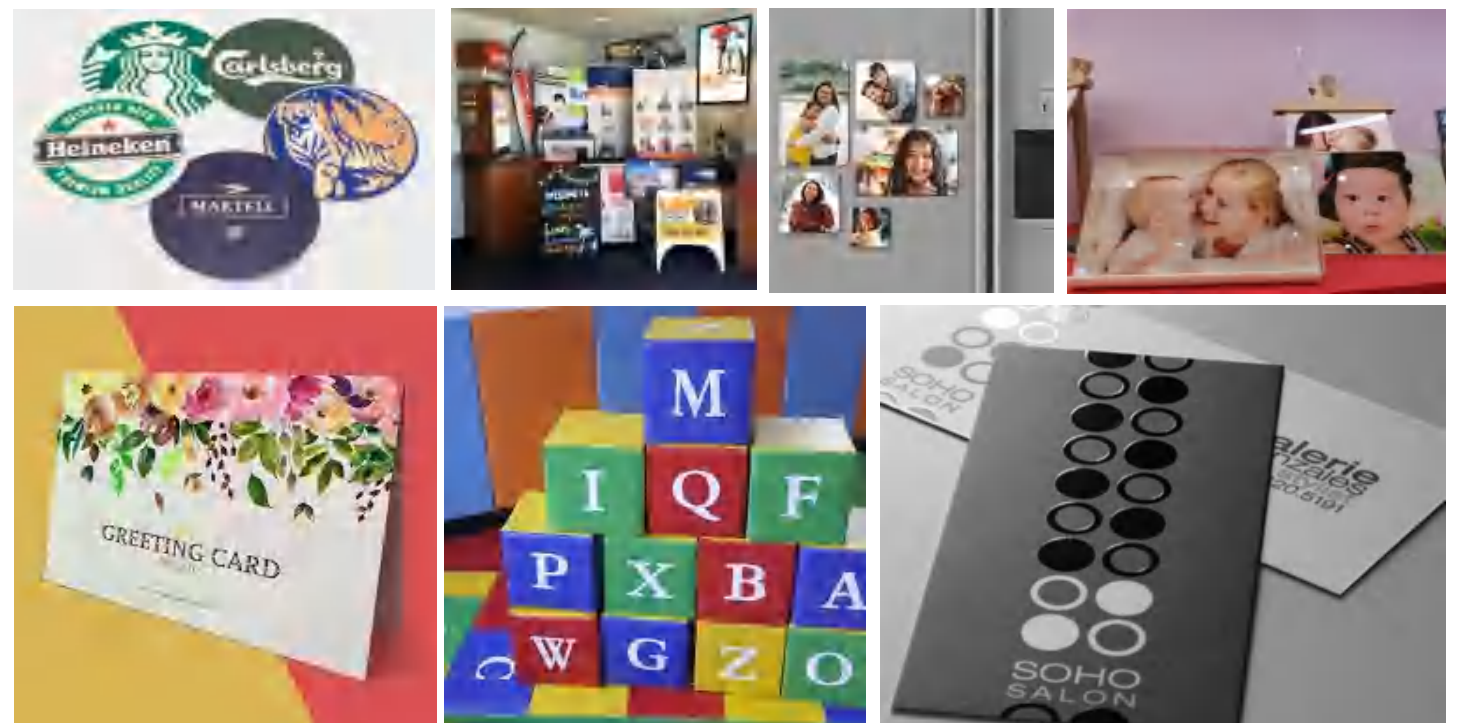

iLOVEUV



IUV2513 UV FLATBED PRINTER

EPSON I3200-U1; RICOH G6/G5

2-12 pcs

PRINT SPEED

22m²/h

4PASS

15m²/h

6PASS

10m²/h

8PASS

UV- PRINTERS

TECHNICAL PARAMETERS

PRINT SIZE	2500*1300mm	PRINTING HEIGHT	100mm
PRINT HEAD	EPSON I3200-U1/Ricoh G6/G5	MAXIMUM LOAD-BEARING CAPACITY OF THE PLATFORM	100kg/m ²
PRINTING COLORS	C.M.Y.K.W.(lc.lm.varnish)	PRINTING ACCURACY	1200*720DPI
WORKING ENVIRONMENT	Temperature:18-30℃ Humidity: 40-60%	IMAGE FORMAT	TIFF、BMP/PDF/EPS/JPEG
NUMBER OF HEADS	2-12pcs	COOLING SYSTEM	UV curing water cyde
PRINTING INTERFACE	High speed USB transmission interface 3.0	POWER REQUIREMENTS	AC220V/110 50Hz-60Hz
RIP SOFTWARE	PP/ Onyx /MainTop	PACKING SIZE	5000*1700mm*2160mm

PRODUCT FEATURES



Aviation large aluminum beam



Linear motor




1um metal grating




Japanese THK silent guide rail



German igus tow chain

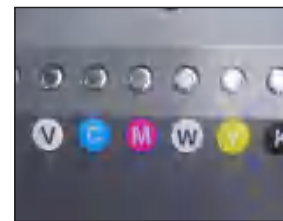

Separate colors and press ink

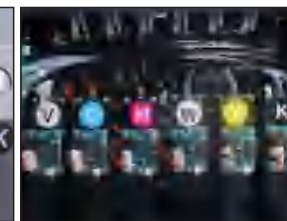

Electric valve secondary cartridge



360 degree two-way collision avoidance




Hidden static removal device



Ink report ink display system

APPLICATION

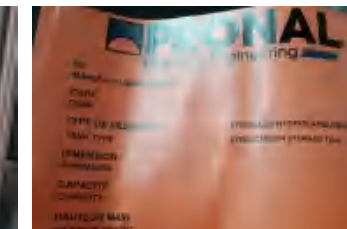



IUV 1800-4/6 HYBRID UV PRINTER

EPSON I3200 U1

4/6-Head Configuration

PRINT SPEED

2 CMYK

14m²/h

6PASS

FULL CMYK


25m²/h

6PASS


TECHNICAL PARAMETERS

PRINTER MODEL	IUV1800-4/6	RIP SOFTWARE	Maintop
PRINT WIDTH	1850mm	SUPPLY VOLTAGE	AC220V
PRINTER HEAD	Epson i3200-U1 4/6 heads	POWER	4KW
WORKING ENVIRONMENT	Temperature:18-30℃ Humidity: 40-60%	EQUIPMENT SIZE	3573X1180X1500mm
INK TYPE	UV ink/Eco solvent Ink	PACKING SIZE	3733X1428X1745mm
EQUIPMENT WEIGHT	Net weight 1250kg gross weight 1450kg		


PRODUCT FEATURES

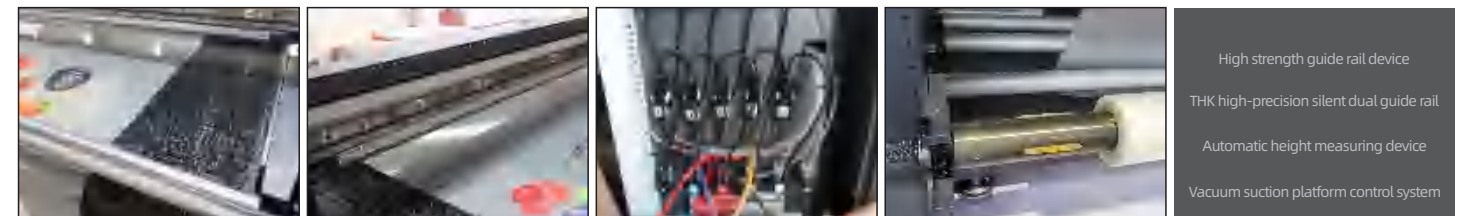

APPLICATION

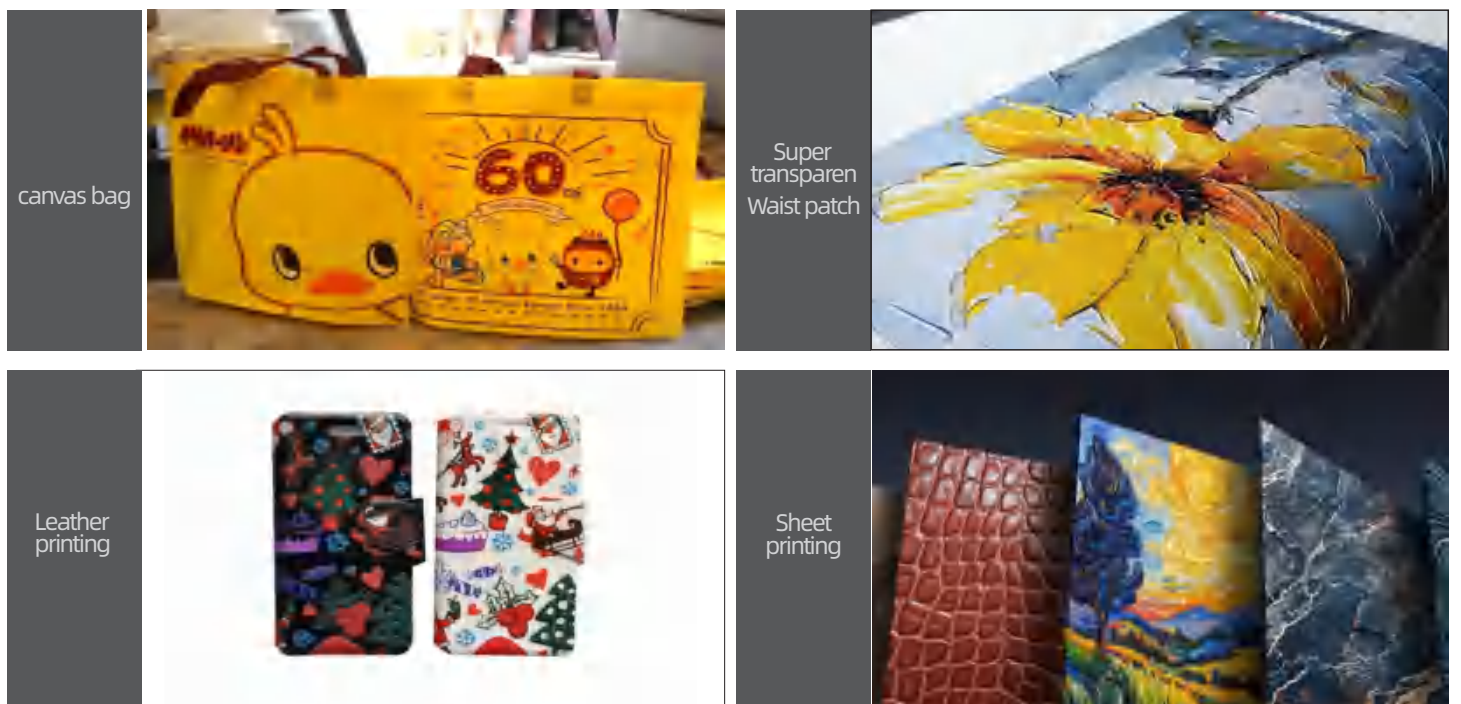

iLOVEUV

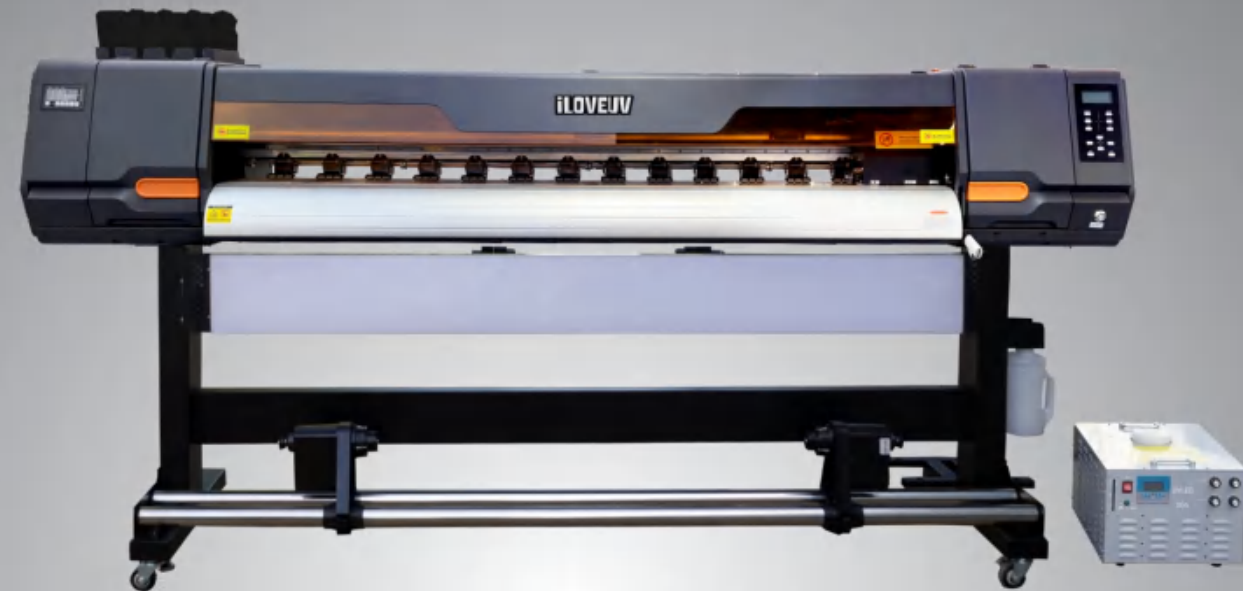

IUV2180 ROLL TO ROLL UV PRINTER

EPSON F1080/I3200-U1

1/2-Head Configuration

PRINT SPEED

12m²/h

6PASS

8m²/h



8PASS

UV- PRINTERS

TECHNICAL PARAMETERS

PRINTER MODEL	IUV2180	RIP SOFTWARE	Maintop
PRINT WIDTH	1650mm	SUPPLY VOLTAGE	AC220V
PRINTER HEAD	EPSON F1080/I3200-U1	POWER	2.7KW
WORKING ENVIRONMENT	Temperature:18-30℃ Humidity: 40-60%	PACKING SIZE	2900X750X650mm
INK TYPE	UV ink		
EQUIPMENT WEIGHT	Net weight 270kg gross weight 300kg		

PRODUCT FEATURES

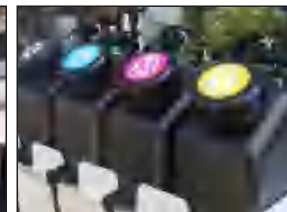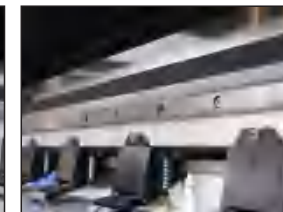


- High strength guide rail device
- THK high-precision silent dual guide rail
- Automatic height measuring device
- Vacuum suction platform control system

APPLICATION


canvas bag



Super
transparent
Waist patch

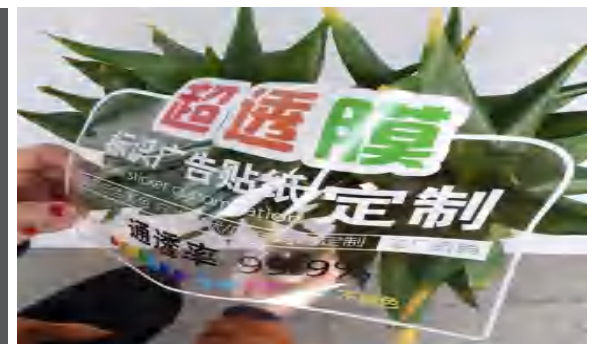

Leather
printing

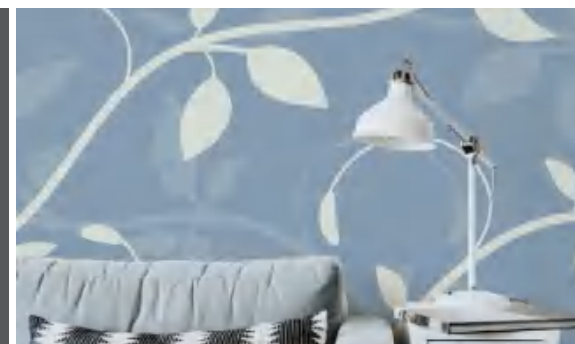

Sheet
printing





IUV2102 ROLL TO ROLL UV PRINTER

EPSON I3200-U1/F1080

2-Head Configuration

PRINT SPEED

18m²/h

6PASS


14m²/h

8PASS

TECHNICAL PARAMETERS

PRINTER MODEL	IUV2102	RIP SOFTWARE	Maintop
PRINT WIDTH	1850mm	SUPPLY VOLTAGE	AC220V
PRINTER HEAD	EPSON i3200-U1/F1080*2 Pcs	POWER	2.7KW
WORKING ENVIRONMENT	Temperature:18-30°C Humidity: 40-60%	EQUIPMENT SIZE	3033X730X1407mm
INK TYPE	CMYK/CMYK+W	PACKING SIZE	3110X770X850mm
EQUIPMENT WEIGHT	Net weight 220kg gross weight 290kg		

PRODUCT FEATURES

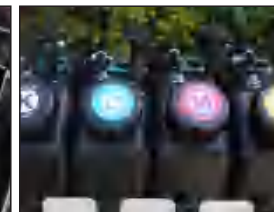

- High strength guide rail device
- THK high-precision silent dual guide rail
- Automatic height measuring device
- Vacuum suction platform control system

APPLICATION





IUV8194 ROLL TO ROLL UV PRINTER

EPSON I3200-U1

4-Head Configuration

CMYK/W/CMYK/V; FULL CMYK; 2 CMYK/2W
FULL CMYK PRINT SPEED

30m²/h

6PASS



24m²/h

8PASS

TECHNICAL PARAMETERS

PRINTER MODEL	IUV8194	RIP SOFTWARE	Maintop
PRINT WIDTH	1800mm	SUPPLY VOLTAGE	AC220V
PRINTER HEAD	EPSON i3200-U1*4	POWER	9.3KW
WORKING ENVIRONMENT	Temperature:18-30°C Humidity: 40-60%	EQUIPMENT SIZE	3115X960X1600mm
INK TYPE	UV ink	PACKING SIZE	3324X920X1100mm
EQUIPMENT WEIGHT	gross weight 550kg		

PRODUCT FEATURES

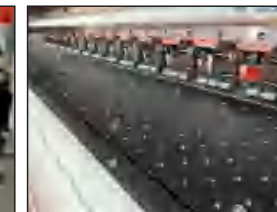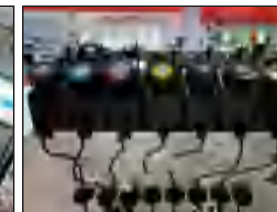


High strength guide rail device
THK high-precision silent dual guide rail
Automatic height measuring device
Vacuum suction platform control system

APPLICATION


canvas bag



Super
transparen
Waist patch

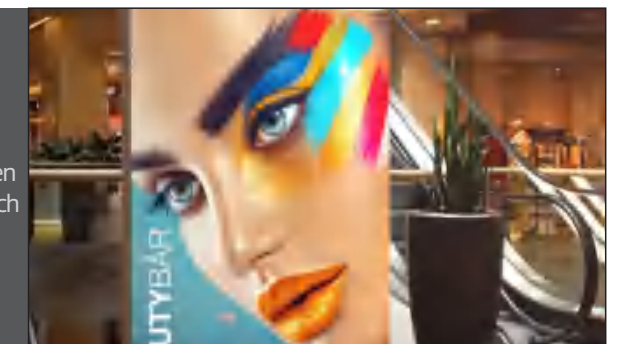

Leather
printing

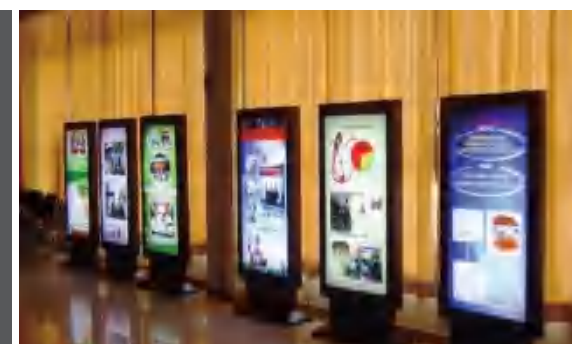

Sheet
printing





IUV3200-2 ROLL TO ROLL UV PRINTER

EPSON I3200-U1/F1080

2-Head Configuration

FULL CMYK
PRINT SPEED



20m ² /h	15m ² /h	10m ² /h	7m ² /h
6PASS	8PASS	6PASS	8PASS

WHITE/CMYK
PRINT SPEED

TECHNICAL PARAMETERS

PRINTER MODEL	IUV3200-2	RIP SOFTWARE	Maintop
PRINT WIDTH	3200mm	SUPPLY VOLTAGE	AC220V
PRINTER HEAD	EPSON i3200-U1/F1080*2	POWER	9.4KW
WORKING ENVIRONMENT	Temperature:18-30°C Humidity: 40-60%	EQUIPMENT SIZE	4395X874X1475mm
INK TYPE	UV ink	PACKING SIZE	4490X950X1700mm
EQUIPMENT WEIGHT	Net weight 640kg gross weight 720kg		

PRODUCT FEATURES

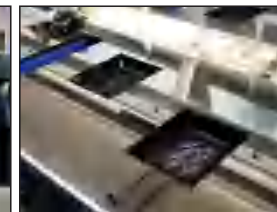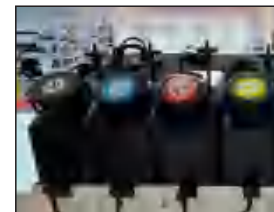

- High strength guide rail device
- THK high-precision silent dual guide rail
- Automatic height measuring device
- Vacuum suction platform control system

APPLICATION


canvas bag




Super
transparen
Waist patch



Leather
printing

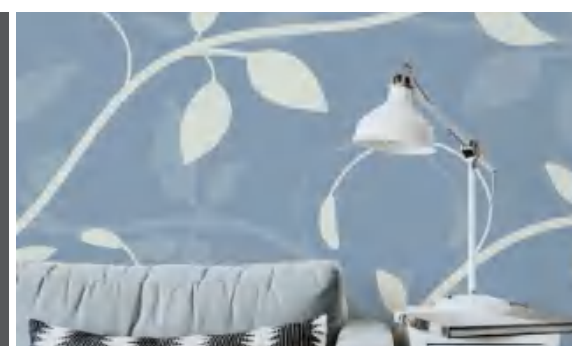

Sheet
printing

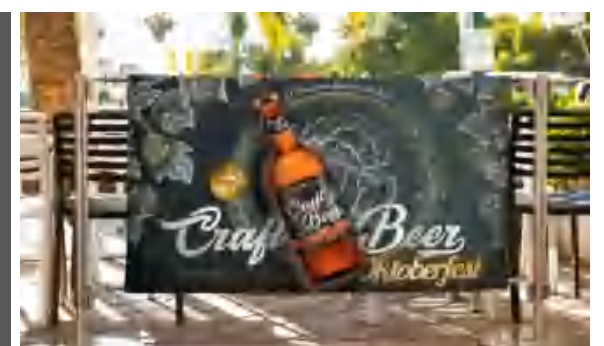



IUV3200-4
ROLL TO ROLL UV PRINTER

EPSON I3200-U1

4-Head Configuration

FULL CMYK
PRINT SPEED

35m²/h

6PASS

28m²/h

8PASS

CMYK WHITE CMYK VARNISH
PRINT SPEED

10m²/h

6PASS

7m²/h

8PASS

TECHNICAL PARAMETERS

PRINTER MODEL	IUV3200-4	RIP SOFTWARE	Maintop
PRINT WIDTH	3200mm	SUPPLY VOLTAGE	AC220V
PRINTER HEAD	EPSON i3200-U1*4	POWER	9.4KW
WORKING ENVIRONMENT	Temperature:18-30℃ Humidity: 40-60%	EQUIPMENT SIZE	4630X920X1630mm
INK TYPE	UV ink	PACKING SIZE	4750X1000X1820mm
EQUIPMENT WEIGHT	Net weight 800kg gross weight 970kg		

PRODUCT FEATURES



High strength guide rail device

THK high-precision silent dual guide rail

Automatic height measuring device

Vacuum suction platform control system

APPLICATION

canvas bag



Super
transparen
Waist patch



Leather
printing



Sheet
printing

